

LAMINATED BREEDING EQUIPMENT SYSTEM FOR BROILER

层叠式肉鸡笼养设备




◆ 单体肉鸡笼

- ⊕ 主体构架为无锌花热镀锌板，镀锌层厚度为275g/m²。笼丝采用焊后整体热镀锌工艺，无锌渣，使用寿命长。
- ⊕ 横向、纵向骨架坚固可靠，简单高效，保证笼体稳固，无塌陷。
- ⊕ 笼具规格：1250mm长*1000mm宽，笼上养殖通风空间450mm，笼下两侧留有敞开式通风口50&80mm，总层高600mm，通风好。

◆ Single cage for broiler

- ⊕ Main frame structure of the equipment is made of hot-dip galvanizing steel plate which zinc coating thickness is 275g/m². Post welding hot-dip galvanized process is adopted for the whole cage mesh, which has no zinc dreg and long service life after adopting special galvanization technology.
- ⊕ Transverse and longitudinal connected frame structure is not only solid and reliable, but also simple and efficient, which ensures the stability of cage with no collapse.
- ⊕ The cage size is 1250mm length×1000mm width×450mm height. The total height of tier is 600mm because of that there are open vents with 50&80mm on both sides of the cage. The vents are good for ventilation performance of the boiler cage.

3/4层单体肉鸡笼
3/4 tiers single cage for broiler

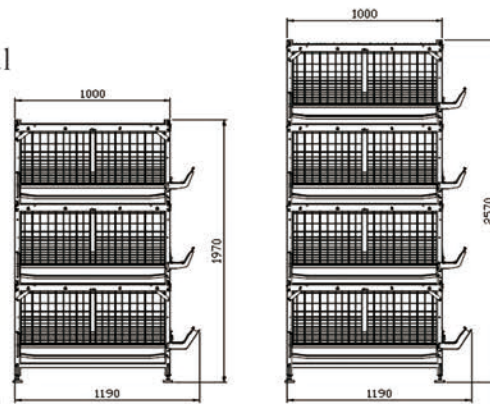

层数 No. of tier	占位面积 (cm ²) average area/bird	养殖数量 (羽/笼) birds/cage	层距 (mm) tier distance	笼长 (mm) cage length	笼深 (mm) cage width	笼高 (mm) cage height
3	500	25	600	1250	1000	450
4	500	25	600	1250	1000	450



单体肉鸡笼 1250×1000×450



贺富设计的防偏盒防止粪带跑偏，非常实用



抓鸡端可踩抓鸡



水线提升处有塑料件，水线钢丝更加耐磨



粪带两端有出风口，保持鸡粪干燥，并且冲粪时方便冲洗



有“簸箕”防止鸡粪掉落地上，还有机尾轴内刮粪板



采食端有脚踏管，方便两边抓鸡，上笼门可开启