

### ◆双体肉鸡笼


- ⊕ 主体构架为无锌花热镀锌板，镀锌层厚度为275g/m<sup>2</sup>。笼丝整体采用焊后热镀锌工艺，无锌渣，使用寿命长。
- ⊕ 横向、纵向连接结构坚固可靠，简单高效，保证笼体稳固，无塌陷。
- ⊕ 1250mm长\*800mm宽一组，采用大网门整体内推式，更便于人的操作。

### ◆Double cage for broiler


- ⊕ Main frame structure of the equipment is made of hot-dip galvanized steel plate which zinc coating thickness is 275g/m<sup>2</sup>. Post welding hot-dip galvanized process is adopted for the whole cage mesh, which has no zinc dreg and long service life after adopting special galvanization technology.
- ⊕ Transverse and longitudinal connected frame structure is not only solid and reliable, but also simple and efficient, which ensures the stability of cage with no collapse.
- ⊕ The cage size is 1250mm length×800mm width. The overall inner pushing type of big net gate is adopted for easy manual operation.

### 3/4层双体肉鸡笼

#### 3/4 tiers double cage for broiler

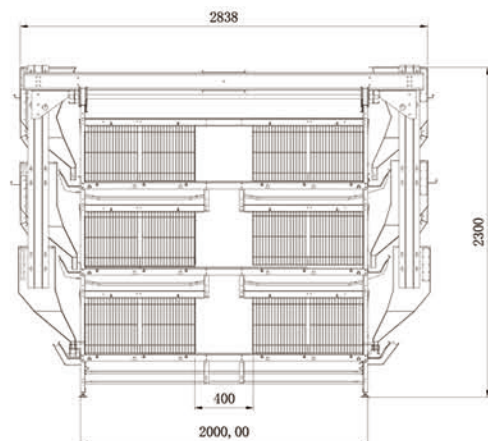

通风口尺寸400mm

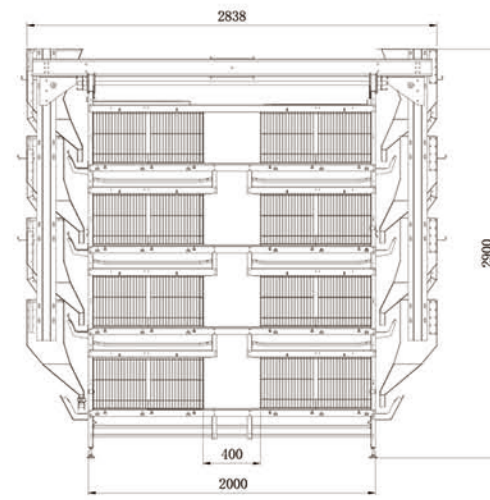

通风口尺寸400mm

层数 No. of tier	占位面积 (cm <sup>2</sup> ) average area/bird	养殖数量 (羽/笼) birds/cage	层距 (mm) tier distance	笼长 (mm) cage length	笼深 (mm) cage width	笼高 (mm) cage height
3	500	20	600	1250	800	450
4	500	20	600	1250	800	450




双体肉鸡笼 1250×800×450




采食端上下笼门可开启



采用背负式行车

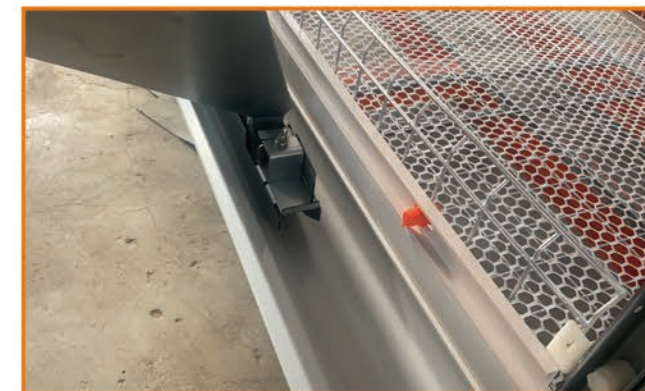

匀料器

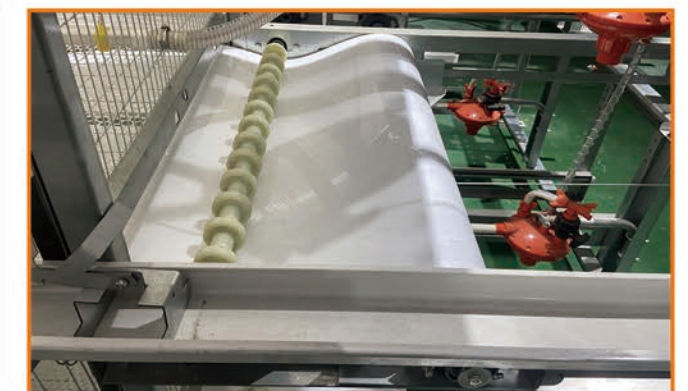

回料装置



拖粪带处是弧形，底网有三根杆支撑



水线提升为绞盘